


LG Chem Uit en aanzetten

U moet de batterij terug manueel opzetten zoals u op de bijlage ziet.

De schakelaar staat nu in het midden je moet deze in 1 vloeiende beweging op OFF en dan door naar ON zetten.

Dan zal de batterij herstarten.


Battery Pack Installation

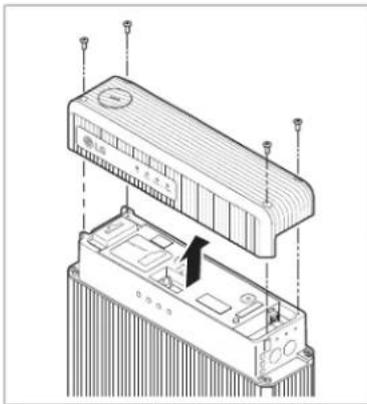


1. Remove the top cover. Loosen the four hex-socket screws at each corner of the cover, and pull it up.
2. Make sure to set the **SW select** DIP switch to 0011₂. See *Configuring Battery pack* on page 39.

NOTE

possible to measure the voltage of the battery pack only if the **SW select** DIP switch is set to 0011₂.

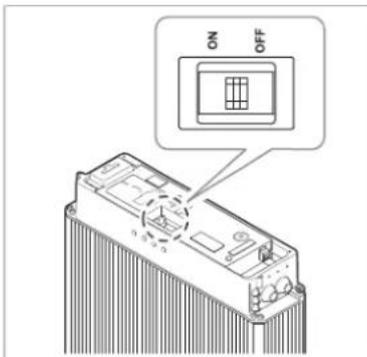

3. At the first installation, make sure that the circuit breaker switch is in the Trip position between the **ON** and **OFF** positions.
4. Push the circuit breaker switch behind the **OFF** position until it cannot go any further and then push it to the **ON** position. If the switch moves by itself to any of the other positions, do not use the battery pack. Contact LG Chem or your distributor.

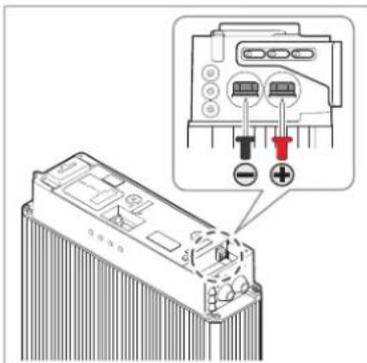

5. Measure the voltage at the terminal block using a voltmeter. If the voltage is lower than 38 V, do not use the battery pack. Contact LG Chem or your distributor.